



Insulated contact wire hanger

Near bridges, tunnels, depots etc. it is often necessary to insulate the catenary in order to maintain safety distances. In such areas the new non-conductive KAGO Hanger will provide safe suspension of the contact wire. Even in high humidity, electrical flashovers are completely eliminated.

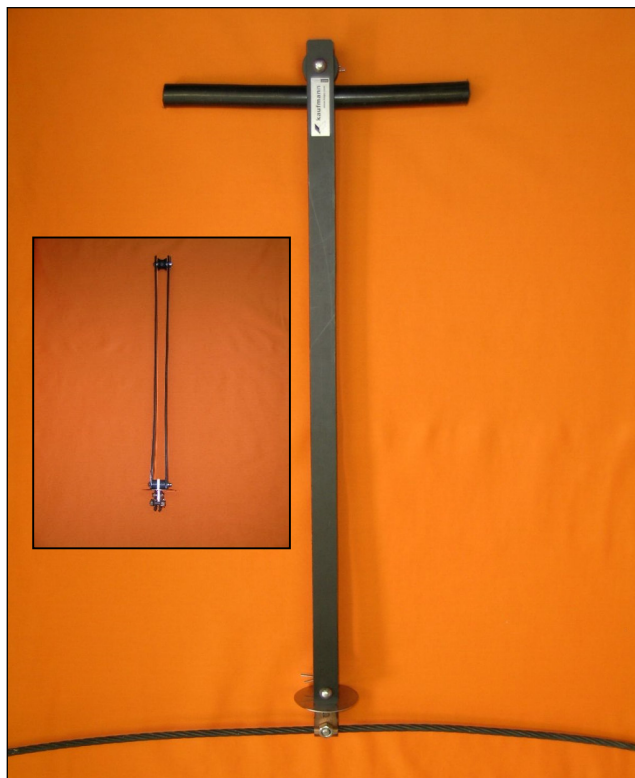

With roll for temporary and permanent installation. Article No. 618250.450V

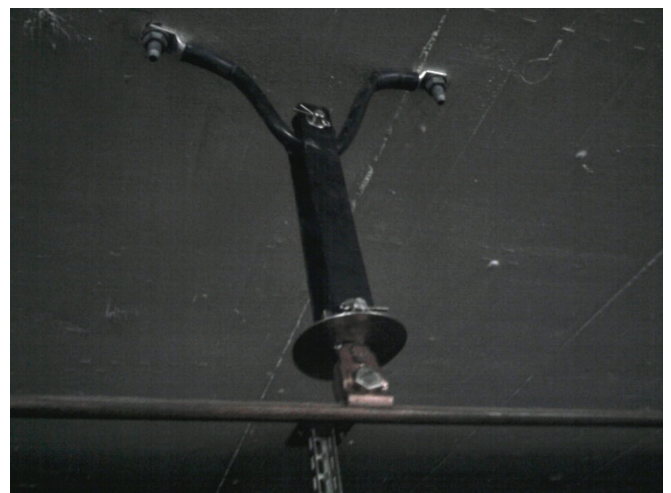

New: Special version for situations without catenary wire

Installation: To cut to the correct length on site, an iron saw, a drill and a 10.5 mm drill bit are required. Caution: When cutting off, keep to minimum distance of 1cm/kV between contact wire and bridge or tunnel.

Technical data: High quality synthetic material / Non-ageing / Weather and UV resistant / Non-hygroscopic / Colour: black / Width: 30 mm / Standard length 750 mm. Material thickness: 5 mm.

Maintenance recommendation: Hanger should be cleaned every 24 months.

KAGO – Your specialist for electrical insulations